






<b>Weight</b>	825 lbs [374 kg]		
<b>ERV for York Units Listed Below</b>			
<b>SUN 1725</b> ZF/DH 210-300; DJ/ZJ/ZR/DR 180-300; XP 180-240; DM 240-300			
<b>Power Requirements</b>			
<b>UNIT</b>	<b>FLA</b>	<b>MCA</b>	<b>MOP</b>
SUN1725 MIN OA 208 V, 3ph	11.77	14.71	15.24
SUN1725 MIN OA 230 V, 3ph	10.64	13.30	13.78
SUN1725 MIN OA 460 V, 3 ph	5.54	6.93	7.11
<b>Ver. #</b>	<b>1.0.0</b>	<b>Date:</b>	<b>9.23.13</b>

**EM \* - \* - \* \* \* \* \* - \***

<b>size</b>	<b>unit/ton</b>	<b>voltage</b>	<b>control</b>
D - MIN OA LOW E - MIN OA STD F - MIN OA HIGH	SUN 1725	E - 208 VAC, 1 Φ F - 208 VAC, 3 Φ G - 230 VAC, 1 Φ H - 230 VAC, 3 Φ K - 460 VAC, 3 Φ	0 - ELECTRO MECH A - IAQ


<b>wheel</b>	<b>disconnect</b>	<b>maintenance indicator</b>	<b>options</b>
A - TOTL ENTHLPY B - SENSIBLE ONLY C - PURGE	0 - NO DISCONNECT A - 240 V NON FUSED B - 240 V FUSED C - 600 V NON FUSED D - 600 V FUSED	0 - NO INDICATORS A - DIRT FILT INDIC	0 - NO OPTIONS C - BUILDING PRESS D - FROST PROTECT E - HUMIDITY SENS F - BACNET

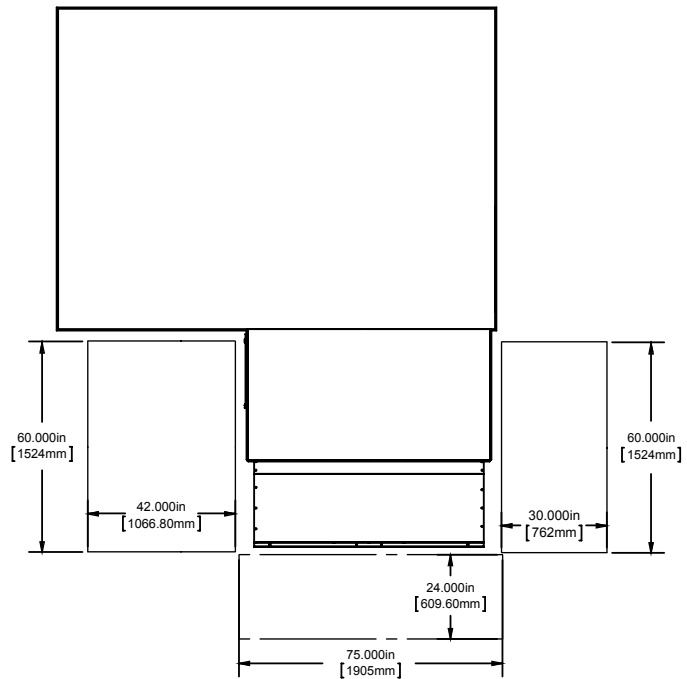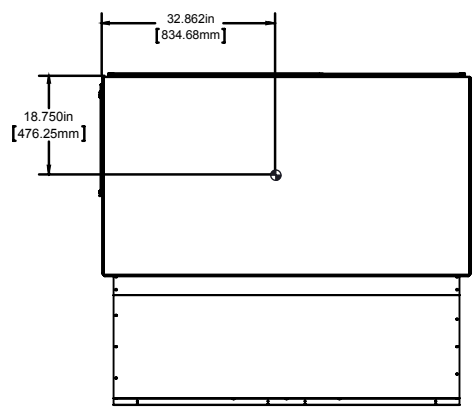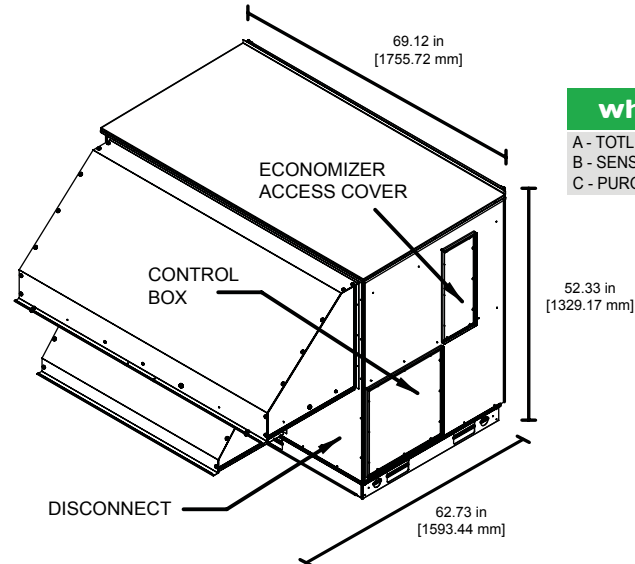

\*Units designed for vertical return


Wiring Diagram - Variable Speed (pg 1 of 2)

Version 1.2 - 1/08/2014

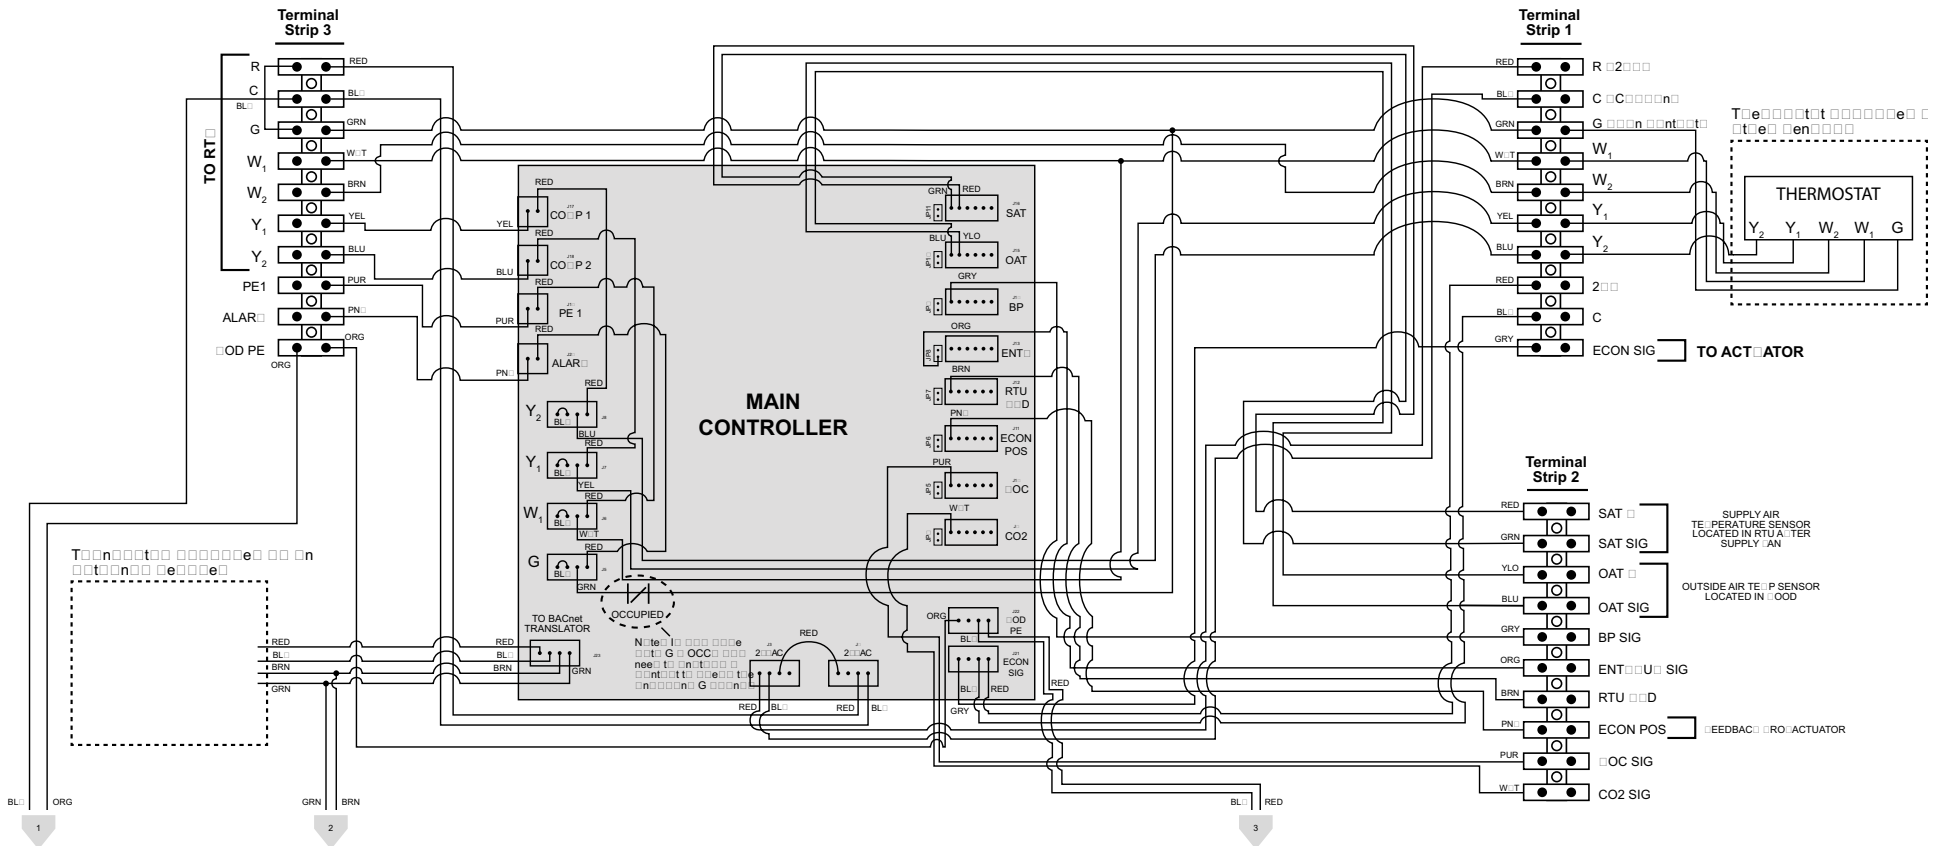

Wiring Diagram - Variable Speed (pg 2 of 2)


Version 1.2 - 1/08/2014

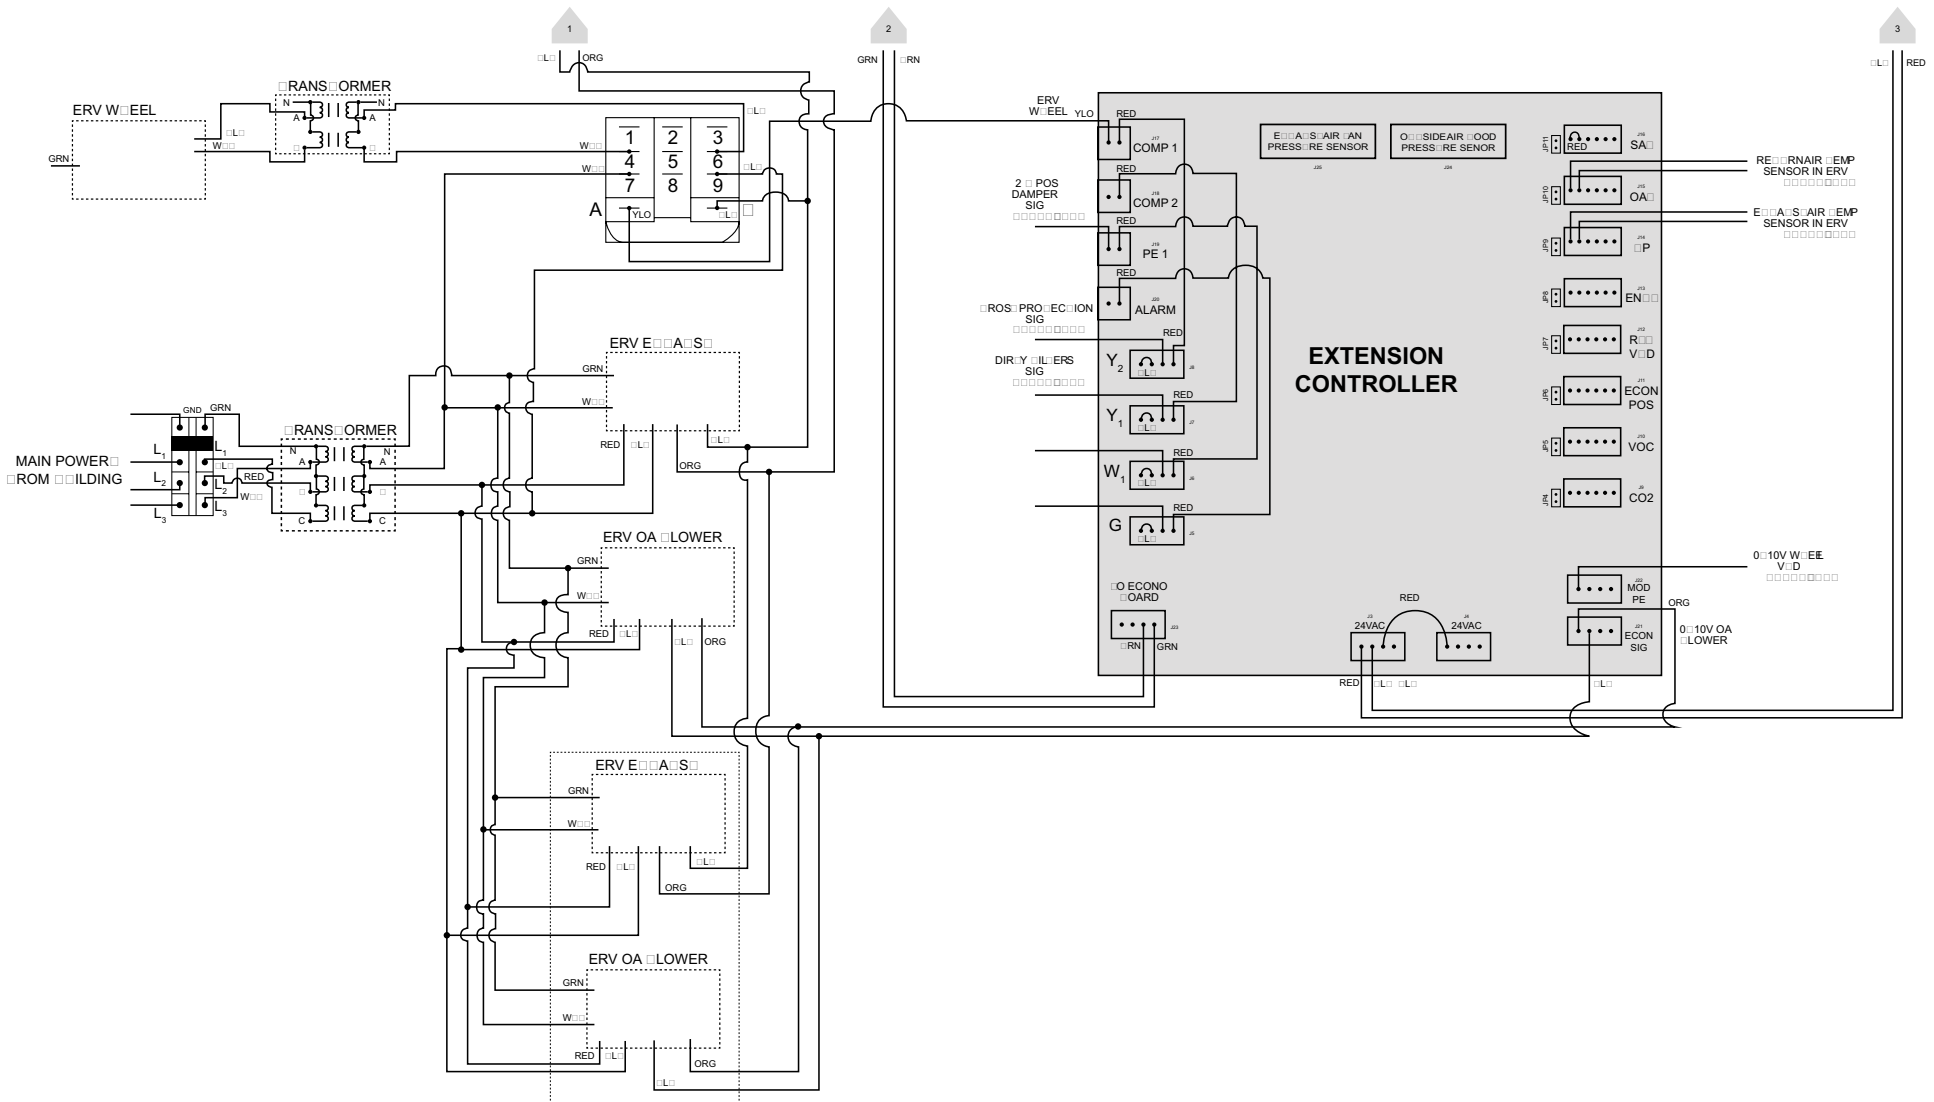


Technical Detail - Terminal Strip & I/O (page 1 of 2)

PIN	NAME	IN / OUT	TYPE
T1-1	R 24V	INPUT	LINE VOLTAGE
T1-2	C (COMMON)	INPUT	LINE VOLTAGE
T1-3	G (FAN CONTACT)	INPUT	DIGITAL
T1-4	W1	INPUT	DIGITAL
T1-5	W2	INPUT	JUMPER
T1-6	Y1	INPUT	DIGITAL
T1-7	Y2	INPUT	DIGITAL
T1-8	24V	INPUT	LINE VOLTAGE
T1-9	C	INPUT	LINE VOLTAGE
T1-10	ECON SIG	INPUT	ANALOG 0-10V
T2-1	SAT +	INPUT	ANALOG 0-10V
T2-2	SAT SIG	INPUT	ANALOG 0-10V
T2-3	OAT +	INPUT	ANALOG 0-10V
T2-4	OAT SIG	INPUT	ANALOG 0-10V
T2-5	BP SIG	INPUT	ANALOG 0-10V
T2-6	ENT/HUM SIG	INPUT	ANALOG 0-10V
T2-7	RTU VFD	INPUT	ANALOG 0-10V
T2-8	ECON POS	INPUT	ANALOG 0-10V
T2-9	VOC SIG	INPUT	ANALOG 0-10V
T2-10	CO2 SIG	INPUT	ANALOG 0-10V

Terminal Strip 1

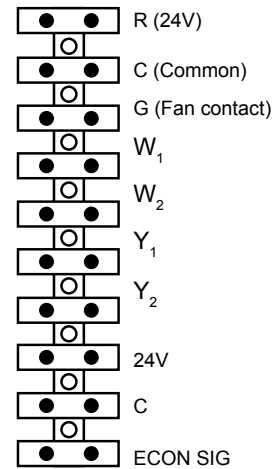

Terminal Strip 2

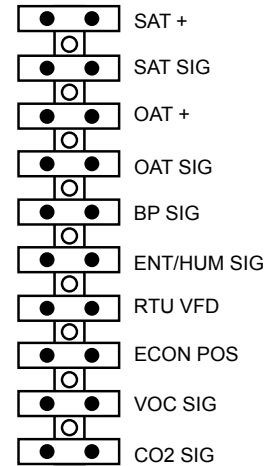

\* Any 0-10V signal can be modified to be a 4-20 mA signal. See instructions for how to make this modification.

Technical Detail - Terminal Strip & I/O (page 2 of 2)

PIN	NAME	IN / OUT	TYPE
T3-1	R	OUTPUT	LINE VOLTAGE
T3-2	C	OUTPUT	LINE VOLTAGE
T3-3	G	OUTPUT	DIGITAL
T3-4	W1	OUTPUT	DIGITAL
T3-5	W2	OUTPUT	JUMPER
T3-6	Y1	OUTPUT	DRY CONTACT
T3-7	Y2	OUTPUT	DRY CONTACT
T3-8	PE1	OUTPUT	DRY CONTACT
T3-9	ALARM	OUTPUT	DRY CONTACT
T3-10	MOD PE	OUTPUT	ANALOG 0-10V

\* Any 0-10V signal can be modified to be a 4-20 mA signal. See instructions for how to make this modification.

